


National Gypsum

PERMABASE[®] BRAND CEMENT BOARD VENEER PLASTER SYSTEM

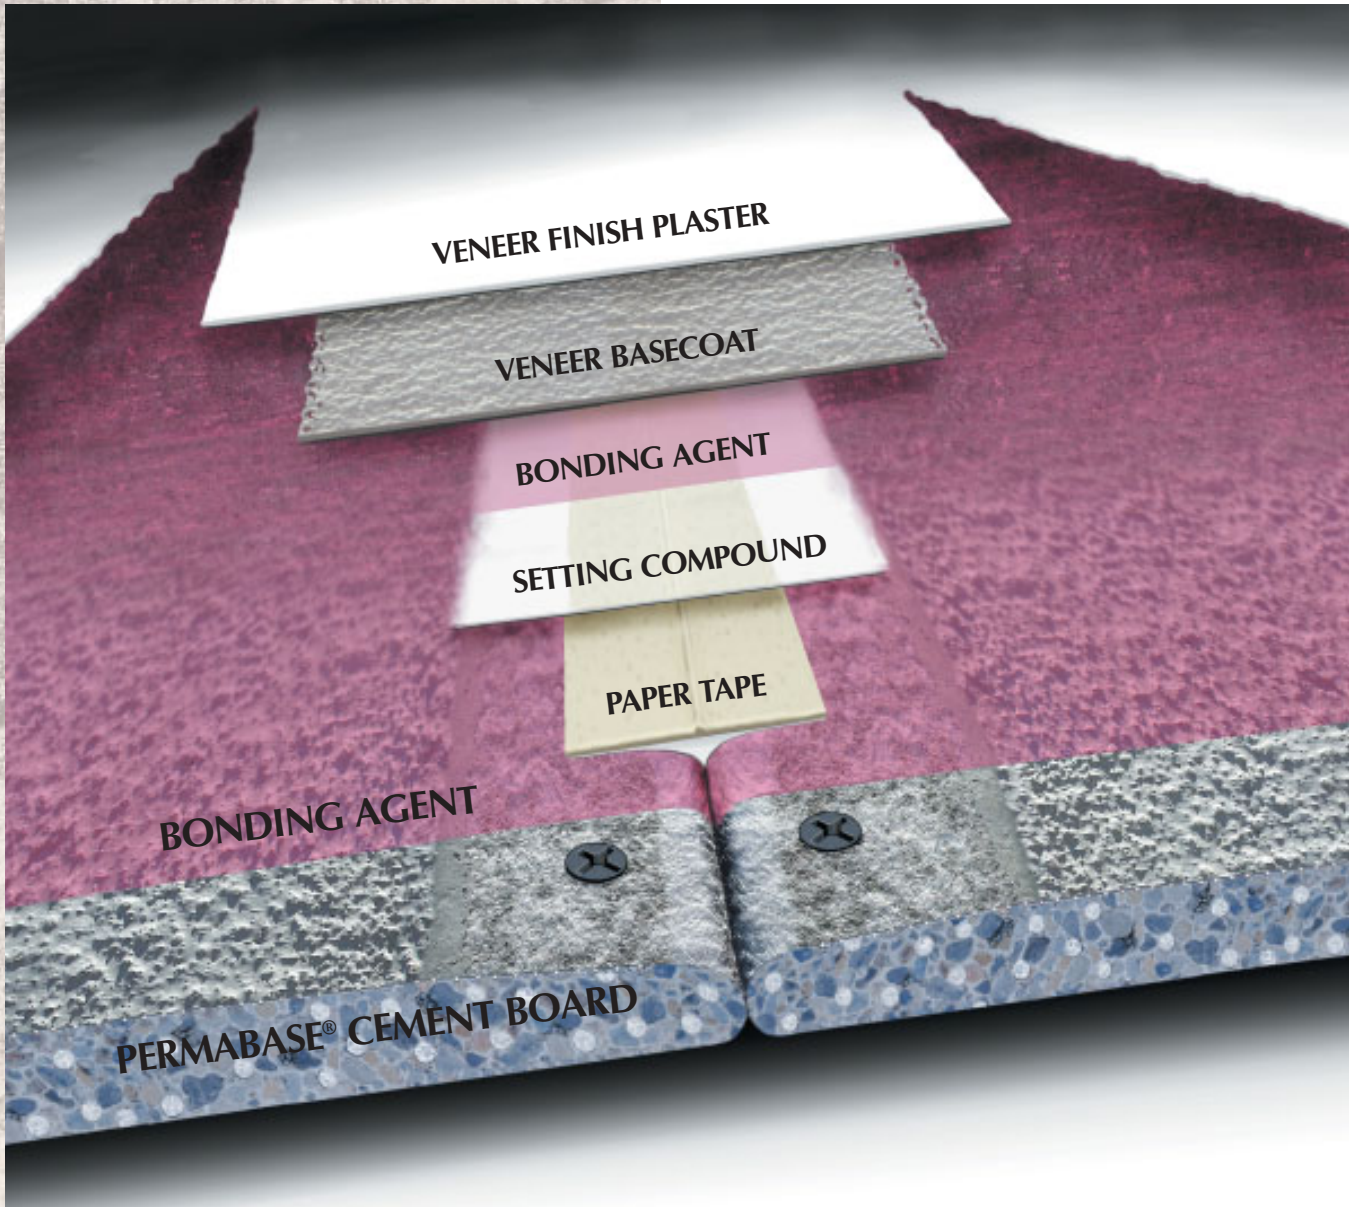

National 
Gypsum
COMPANY

PERMABASE[®] BRAND CEMENT BOARD VENEER PLASTER SYSTEM

DESCRIPTION

The PermaBase[®] BRAND Veneer Plaster construction system for interior walls and ceilings improves impact and abrasion resistance in high abuse/high traffic areas. The system consists of a veneer basecoat plaster and a finish coat plaster applied over PermaBase Cement Board, or PermaBase Flex[®] Cement Board for radius construction.

DECORATING


The use of an alkali-resistant primer specifically formulated for use over new plaster will permit decorating with oil or latex type paints. The paint system should be suitable for use over plaster surfaces that contain lime. It is essential that the plaster be sound and completely dry before painting. Under good drying conditions, veneer plaster may be painted 48 hours after application.

LIMITATIONS

- Not recommended for use where there will be direct exposure to water or continuous high humidity conditions such as found in saunas, steam rooms, gang shower rooms or swimming pool enclosures.
- High build, heavy duty and special purpose coatings such as epoxy are not recommended over veneer or job gauged lime putty finishes.
- Maintain a minimum temperature of 55°F to 70°F before, during and after installation of all system components per ASTM C843.
- Steel framing must be 20 gauge (galvanized) or heavier, installed 16" o.c.

PERMABASE FLEX[®]/ VENEER PLASTER SYSTEM

PERMABASE[®]/ VENEER PLASTER SYSTEM

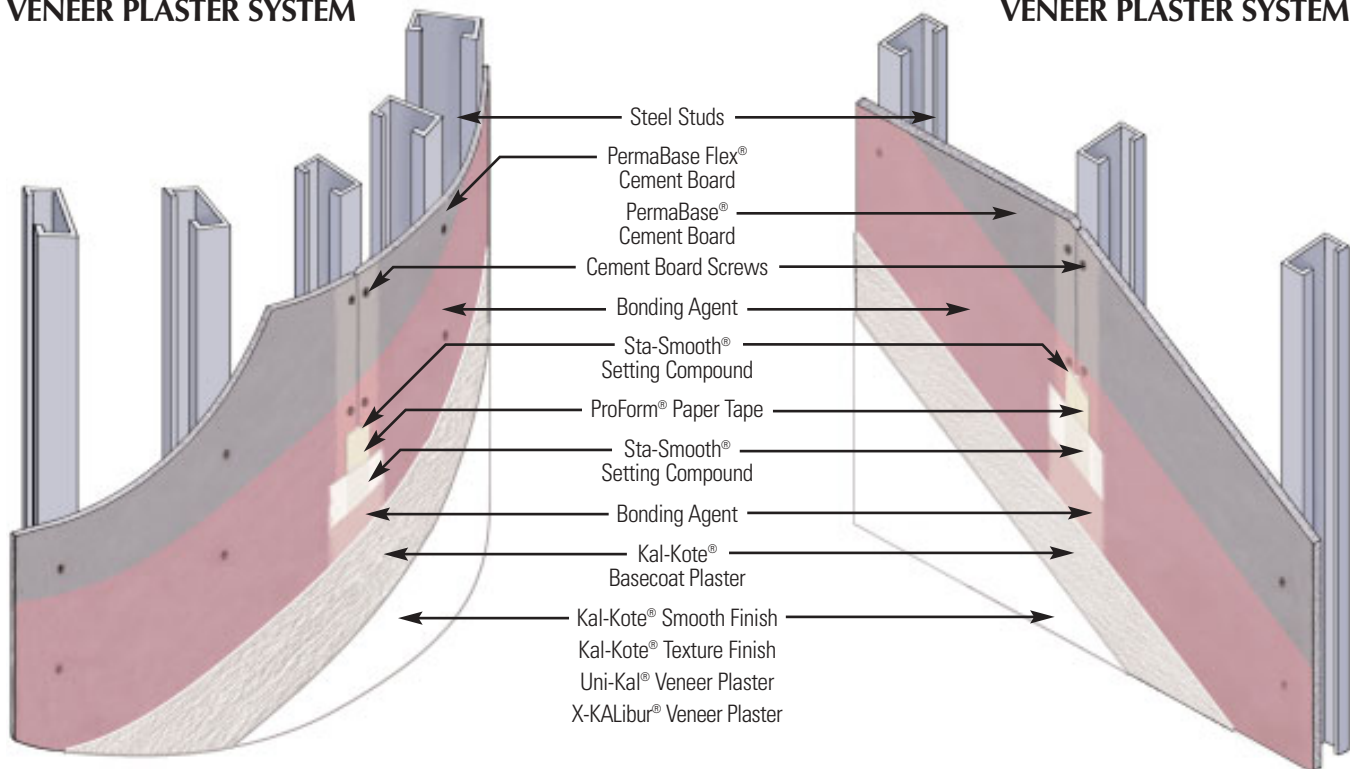

Corporate Headquarters
 National Gypsum Company
 2001 Rexford Road
 Charlotte, NC 28211
 Phone: (704) 365-7300
 www.nationalgypsum.com

Technical Information
 Phone: (800) NATIONAL
 (800) 628-4662
 Fax: (800) FAX-NGC1
 (800) 329-6421

National 
Gypsum
 COMPANY

Excellence Across The Board[®]